



R50C5

Engine ref.	KDI2504TCR-EU5
Alternator ref.	KH00810T
Canopy	M3128
Performance class	G3

GENERAL CHARACTERISTICS

Frequency (Hz)	50 Hz
Voltage (V)	400/230
Standard Control Panel	APM403

Voltage	ESP		PRP		Standby Amps
	kWe	kVA	kWe	kVA	
400/230	40	50	36	45	72

DESCRIPTIVE

- ➔ Stage V engine
- ➔ Four-pole circuit breaker
- ➔ Connection terminal box rental type
- ➔ Containment fuel tank and large autonomy
- ➔ Forks and frame protection pads
- ➔ Residual Current Device and earthing rod
- ➔ Inlet air preheating
- ➔ Battery isolating switch
- ➔ Oil drainage pump
- ➔ Heavy duty air filter with interchangeable cartridge
- ➔ Primary fuel filter
- ➔ Heat hand protections (EC standards)
- ➔ Access door to the radiator

SMALL AUTONOMY DIMENSIONS

Length (mm)	2545
Width (mm)	1150
Height (mm)	1824
Dry weight (kg)	1550
Tank capacity (L)	390

SOUND LEVELS

Acoustic pressure level @1m in dB(A) 50Hz (75% PRP) (Associated uncertainty)	77 (0,10)
Acoustic pressure level @7m in dB(A) 50Hz (75% PRP) (Associated uncertainty)	67
Sound power level guaranteed (Lwa) 50Hz (75% PRP)	96

POWER DEFINITION

PRP : Prime Power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO 8528-1. ESP : The standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO 8528-1. Overload is not allowed.

TERMS OF USE

According to the standard, the nominal power assigned by the genset is given for 25°C Air Inlet Temperature, of a barometric pressure of 100 kPa (100 m A.S.L), and 30 % relative humidity. For particular conditions in your installation, refer to the derating table.

ASSOCIATED UNCERTAINTY

For the generating sets used indoor, where the acoustic pressure levels depends on the installation conditions, it is not possible to specify the ambient noise level in the exploitation and maintenance instructions . You will also find in our exploitation and maintenance instructions a warning concerning the air noise dangers and the need to implement appropriated preventive measures.

R50C5

ENGINE CHARACTERISTICS

GENERAL ENGINE DATAS

Engine brand	KOHLER KDI
Engine ref.	KDI2504TCR-EU5
Air inlet system	Turbo
Cylinders configuration	L
Number of cylinders	4
Displacement (l)	2,48
Charge Air coolant	
Bore (mm) x Stroke (mm)	88 x 102
Compression ratio	17.4 : 1
Speed (RPM)	1500
Pistons speed (m/s)	5,10
Maximum stand-by power at rated RPM (kW)	47,10
Frequency regulation, steady state (%)	< 5%
BMEP @ PRP 50 Hz (bar)	13,80
Governor type	Electronic

COOLING SYSTEM

Radiator & Engine capacity (l)	12
Fan power 50Hz (kW)	2
Fan air flow w/o restriction (m ³ /s)	
Available restriction on air flow (mm H ₂ O)	20
Type of coolant	Glycol-Ethylene

EMISSIONS

Emission PM (g/kW.h)	0,02
Emission CO (g/kW.h)	5
Emission HC+NO _x (g/kWh)	4,70
Emission HC (g/kW.h)	

EXHAUST

Exhaust gas temperature @ ESP 50Hz (°C)	600
Exhaust gas flow @ ESP 50Hz (l/s)	136
Max. exhaust back pressure (mm H ₂ O)	764

FUEL

Consumption @ 100% load ESP (l/h)	12,40
Consumption @ 100% PRP load (l/h)	11
Consumption @ 75% PRP load (l/h)	8,80
Consumption @ 50% PRP load (l/h)	5,80
Maximum fuel pump flow (l/h)	25

OIL

Oil system capacity including filters (l)	11,50
Min. oil pressure (bar)	
Max. oil pressure (bar)	
Oil consumption 100% ESP 50Hz (l/h)	0,01
Oil sump capacity (l)	

HEAT BALANCE

Heat rejection to exhaust (kW)	37
Radiated heat to ambient (kW)	3
Heat rejection to coolant HT (kW)	35


AIR INTAKE

Max. intake restriction (mm H ₂ O)	300
Intake air flow (l/s)	45

Alternator ref.	KH00810T
Number of Phase	Three phase
Power factor (Cos Phi)	0,80
Altitude (m)	0 à 1000
Overspeed (rpm)	2250
Number of pole	4
Capacity for maintaining short circuit at 3 In for 10 s	Yes
Insulation class	H
T° class (H/125°), continuous 40°C	H / 125°K
T° class (H/163°C), standby 27°C	H / 163°K
AVR Regulation	Yes
Total Harmonic Distortion in no-load DHT (%)	<2
Total Harmonic Distortion, on linear load DHT (%)	<4
Wave form : NEMA=TIF	<50
Wave form : CEI=FHT	<2
Number of bearing	Single Bearing
Coupling	Direct
Voltage regulation at established rating (+/- %)	0,50
Recovery time (Delta U = 20% transient) (ms)	500
Indication of protection	IP 23
Technology	Brushless

Continuous Nominal Rating 40°C (kVA)	60
Standby Rating 27°C (kVA)	66
Efficiencies 100% of load (%)	90,30
Air flow (m3/s)	0,10
Short circuit ratio (Kcc)	0,4360
Direct axis synchro reactance unsaturated (Xd) (%)	283
Quadra axis synchro reactance unsaturated (Xq) (%)	144
Open circuit time constant (T'do) (ms)	962
Direct axis transient reactance saturated (X'd) (%)	14,70
Short circuit transient time constant (T'd) (ms)	50
Direct axis subtransient reactance saturated (X''d) (%)	7,30
Subtransient time constant (T''d) (ms)	5
Quadra axis subtransient reactance saturated (X''q) (%)	10,50
Subtransient time constant (T''q) (ms)	5
Zero sequence reactance unsaturated (Xo) (%)	0,60
Negative sequence reactance saturated (X2) (%)	8,93
Armature time constant (Ta) (ms)	8
No load excitation current (io) (A)	0,77
Full load excitation current (ic) (A)	3,18
Full load excitation voltage (uc) (V)	21,30
Engine start (Delta U = 20% perm. or 30% trans.) (kVA)	119,61
Transient dip (4/4 load) - PF : 0,8 AR (%)	13
No load losses (W)	1119,51
Heat rejection (W)	5134,28
Unbalanced load acceptance ratio (%)	100

APM403, basic generating set and power plant control

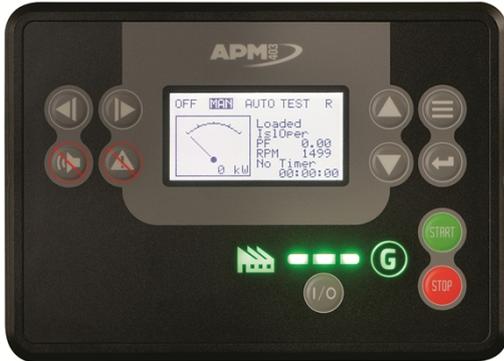

The APM403 is a versatile control unit which allows operation in manual or automatic mode
Measurements : voltage and current
kW/kWh/kVA power meters
Standard specifications: Voltmeter, Frequency meter.
Optional : Battery ammeter.
J1939 CAN ECU engine control
Alarms and faults: Oil pressure, Coolant temperature, Overspeed, Start-up failure, alternator min/max, Emergency stop button.
Engine parameters: Fuel level, hour counter, battery voltage.
Optional (standard at 24V): Oil pressure, water temperature.
Event log/ Management of the last 300 genset events.
Mains and genset protection
Clock management
USB connections, USB Host and PC,
Communications : RS485 INTERFACE
ModBUS protocol /SNMP
Optional : Ethernet, GPRS, remote control, 3G, 4G,
Websupervisor, SMS, E-mails